



GT-600EX

CARRIER : TC-4255-2

GENERAL DATA

CRANE CAPACITY		60,000 kg at 3.0 m
BOOM		5-section, 11.0 m – 43.0 m
DIMENSION		
Overall length	approx.	13,170 mm
Overall width	approx.	3,040 mm
Overall height	approx.	3,730 mm
MASS		
Gross vehicle mass	approx.	41,300 kg
— front axle	approx.	15,800 kg
— rear axle	approx.	25,500 kg
PERFORMANCE		
Max. travelling speed	computed	84 km/h
Gradeability (tan θ)	computed	58 %

CRANE SPECIFICATIONS

MODEL
GT-600EX

CAPACITY
60,000 kg at 3.0 m

BOOM
5-section full power partially synchronized telescoping boom of round box construction with 5 sheaves at boom head. The synchronization system consists of 2 telescope cylinders, extension cables and retraction cables. Selection of 2 boom telescoping modes.
Hydraulic cylinders fitted with holding valves.
Fully retracted length..... 11.0 m
Fully extended length..... 43.0 m
Extension speed..... 32.0 m in 135 s

JIB
2-staged swingaround boom extension. Triple offset (5°/ 25°/ 45°) type. Stows alongside base boom section.
Assistant cylinders for mounting and stowing.
Single sheave at jib head.
Length 8.8 m and 15.2 m

SINGLE TOP (AUXILIARY BOOM SHEAVE)
Single sheave.
Mounted to main boom head for single line work.

ELEVATION
By a double-acting hydraulic cylinder, fitted with holding valve.
Boom angle..... -2° to 81°
Boom raising speed..... 20° to 60° in 39 s

HOIST-Main winch
Variable speed type with grooved drum driven by hydraulic axial piston motor through winch speed reducer. Power load lowering and hoisting.
Equipped with automatic brake (Neutral brake) and counter-balance valve.
Controlled independently of auxiliary winch.
Single line pull..... 54.9 kN {5,600 kgf}
Single line speed..... 139 m/min. (at the 4th layer)
Wire rope..... Spin-resistant type
Diameter x length..... 19 mm x 235 m

HOIST-Auxiliary winch

Variable speed type with grooved drum driven by hydraulic axial piston motor through winch speed reducer. Power load lowering and hoisting.

Equipped with automatic brake (Neutral brake) and counterbalance valve.

Controlled independently of main winch.

Single line pull.....	54.9 kN {5,600 kgf}
Single line speed.....	121 m/min. (at the 2nd layer)
Wire rope.....	Spin-resistant type
Diameter x length.....	19 mm x 127 m

SWING

Hydraulic axial piston motor driven through planetary swing speed reducer. Continuous 360° full circle swing on ball bearing slew ring. Equipped with manually locked/released swing brake.

Swing speed.....	1.7 min ⁻¹ { rpm }
------------------	-------------------------------

HYDRAULIC SYSTEM

Pumps..... 2 variable piston pumps for telescoping, elevating and winches. Tandem gear pump for swing and optional equipment.

Control valves..... Multiple valves actuated by pilot pressure with integral pressure relief valves.

Circuit..... Equipped with air cooled type oil cooler. Oil pressure appears on AML display for main circuit.

Hydraulic oil tank capacity..... approx. 690 liters

Filters..... Return line filter

CRANE CONTROL

By 4 control levers for swing, boom hoist, main winch, boom telescoping or auxiliary winch with 2 control pedals for boom hoist and boom telescoping based on ISO standard layout.

Control lever stands can change neutral positions and tilt for easy access to cab.

CAB

One sided one-man type, steel construction with sliding door access and tinted safety glass windows opening at side. Door window is powered control.

Operator's 3 way adjustable seat with headrest and armrest.

TADANO Automatic Moment Limiter (Model:AML-C)

Main unit in crane cab gives audible and visual warning of approach to overload. Automatically cuts out crane motions (including swing motion) before overload. With working range (load radius and/or boom angle and/or tip height and/or swing range) limit function.

Following functions are displayed.

Moment as percentage
Number of parts of line of rope
Boom angle
Boom length
Load radius
Outriggers position
Actual hook load
Permissible load
Boom position indicator
Potential hook height
Swing angle
Main hydraulic oil pressure
Jib length and Jib offset angle (only when jib operation)

OUTRIGGERS

Hydraulically operated H-type outriggers. Each outrigger controlled simultaneously or independently from either side of carrier. Equipped with sight level gauge. Floats mounted integrally with the jacks retract to within vehicle width. All cylinders fitted with pilot check valves.

Crane operation with different extended length of each outrigger.

Equipped with extension width detector for each outrigger.

Extended width	
Fully.....	7,000 mm
Middle.....	4,800 mm
Minimum.....	2,590 mm
Float size (Diameter).....	400 mm

FRONT JACK

A fifth hydraulically operated outrigger jack. Mounted to the front frame of carrier to permit 360° lifting capabilities.

Hydraulic cylinder fitted with pilot check valve.

Float size(Diameter).....	400 mm
---------------------------	--------

COUNTER WEIGHT

Integral with swing frame

Mass.....	3,770 kg
-----------	----------

CARRIER SPECIFICATIONS

SPEC. SHEET NO. GT-600E-1-00202/EX-11

MANUFACTURER

TADANO LTD.

MODEL

TC-4255-2..... Left-hand steering , 8 x 4

ENGINE

Model..... Daimler OM457LA
Type..... 4 cycle, turbo charged and inter cooled.
Piston displacement ... 11,967 cm³
Bore x stroke..... 128 mm x 155 mm
Max. output 260 kW{353PS} at 1,900 min⁻¹{rpm}
Max. torque 1,850 N-m{188kgf-m} at 1,100 min⁻¹{rpm}

CLUTCH

Dry single plate, hydraulically operated clutch release mechanism with air assisted booster.

TRANSMISSION

9 forward and 1 reverse speeds, synchromesh on 2nd –9th gear and constant-mesh on 1st and reverse gear.

AXLES

Front..... Reverse-elliot type, steering axle.
Rear..... Full floating type, driving axle with inter-wheel differential lock.

STEERING

Dual circuit hydraulic and mechanical steering of both front axles with hydraulic power booster.
3rd axle reduction gear-mounted emergency steering pump.

SUSPENSION

Front..... Hydraulic/pneumatic suspension, with hydraulic lock system and leveling adjustment.
Rear..... Hydraulic/pneumatic suspension, with hydraulic lock system and leveling adjustment.

BRAKE SYSTEM

Service..... Full air brakes on all wheels. Dual-circuit system.
Parking/ Emergency..... Spring loaded brake on rear 4-wheel controlled by knob of spring brake valve.
Auxiliary..... Constant throttle system with exhaust flap brake.

ELECTRIC SYSTEM

24 V DC. 2 batteries of 12 V
Alternator..... 28 V – 80 A

FUEL TANK CAPACITY

300 liters

CAB

2-man full width cab of steel structure, with safety glass. Seats adjustable and air-suspended with headrest and 3point safety belt.

TIRES

Front..... 385/65R22.5, Single x 4
Rear..... 13R22.5, Dual x 4
Spare..... 385/65R22.5, Single x 1

TURN RADIUS

Min. turning radius (at center of extreme outer tire).....12.5m

EQUIPMENT

FOR CRANE

Standard Equipment

Automatic moment limiter (AML)
External lamp (AML)
Pendant type over-winding cutout
Winch automatic fail-safe brake
Cable follower
35t capacity hook block (3 sheaves)
5.6t capacity hook block (swivel hook)
Hook safety latch
Pilot check valves
Counterbalance valves
Hydraulic pressure relief valves
Swing brake
Swing lock
Boom angle indicator
Boom elevation foot pedal
Boom telescoping foot pedal
Outrigger extension width detector
Front jack set up detector
Front jack overload alarm
Automatic speed reduction and soft stop function on boom elevation and/or swing (swing range restricted only)
Hydraulic oil cooler
3 working lights
Front windshield wiper and washer
Roof window wiper and washer
Power window (cab door)
3 way adjustable cloth seat with headrest and armrest
Cab floor mat
Sun visor (front and roof)
Winch drum rotation indicator (visual type)
Winch drum mirror
Air conditioner (crane cab)

Optional Equipment





- 60t capacity hook block (6 sheaves)
- Over-unwinding prevention

FOR CARRIER

Standard Equipment

Spare tire and carrier with lock key
Rear fog lights
Inter-wheel differential gear lock
Emergency steering pump
Fuel tank cap with lock key
Air dryer
Towing hooks (front and rear, eye type)
Engine over-run alarm
Air filter warning light (Instrument cluster)
Cooling water level warning light
Engine hour meter
PTO hour meter
Reversing signal
Low air pressure warning lamp and buzzer
AM / FM radio
Adjustment and heating rearview mirror
Sun visor
Tilting-telescoping steering wheel
3 way adjustable air suspension seat
Tachometer/ Speedometer (with odometer)
Air conditioner (carrier cab)
3 point type seat belt
Windshield wiper and washer
Cigarette lighter
Cruise control
Transmission oil drain cock
Tire inflation
Owner's tool set
Tool box with lock key


Telescoping mode I

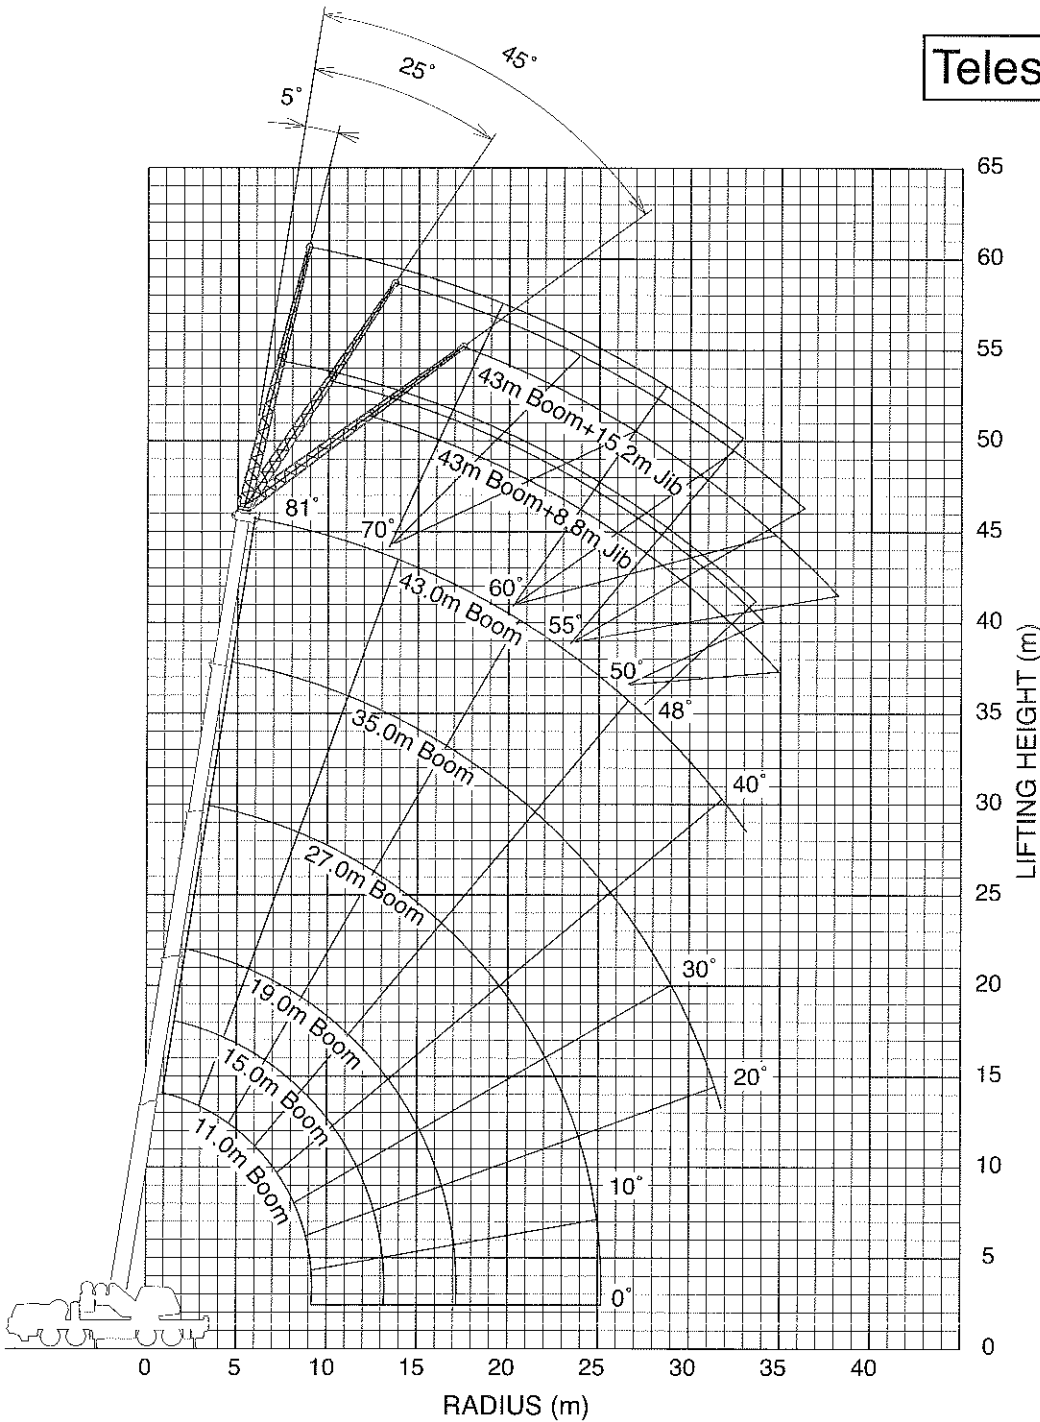


NOTE:

Boom and jib geometry shown are for unloaded condition and machine standing level on firm supporting surface. Boom deflection and subsequent radius and boom angle change must be accounted for when applying load to hook.


Boom Length

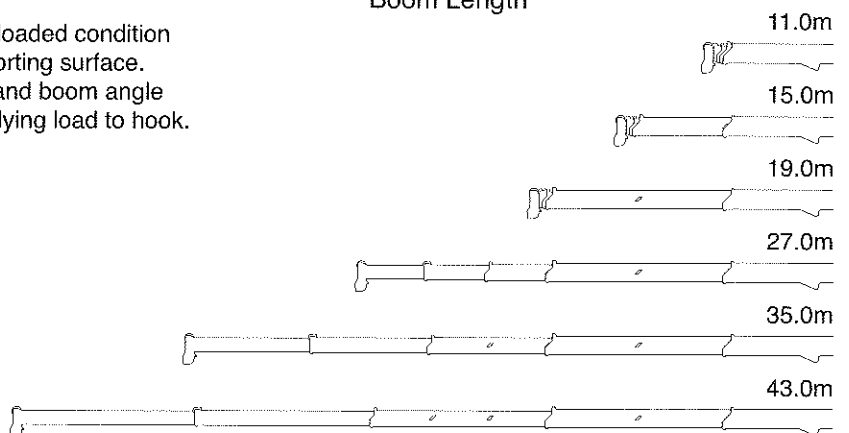


Telescoping mode II

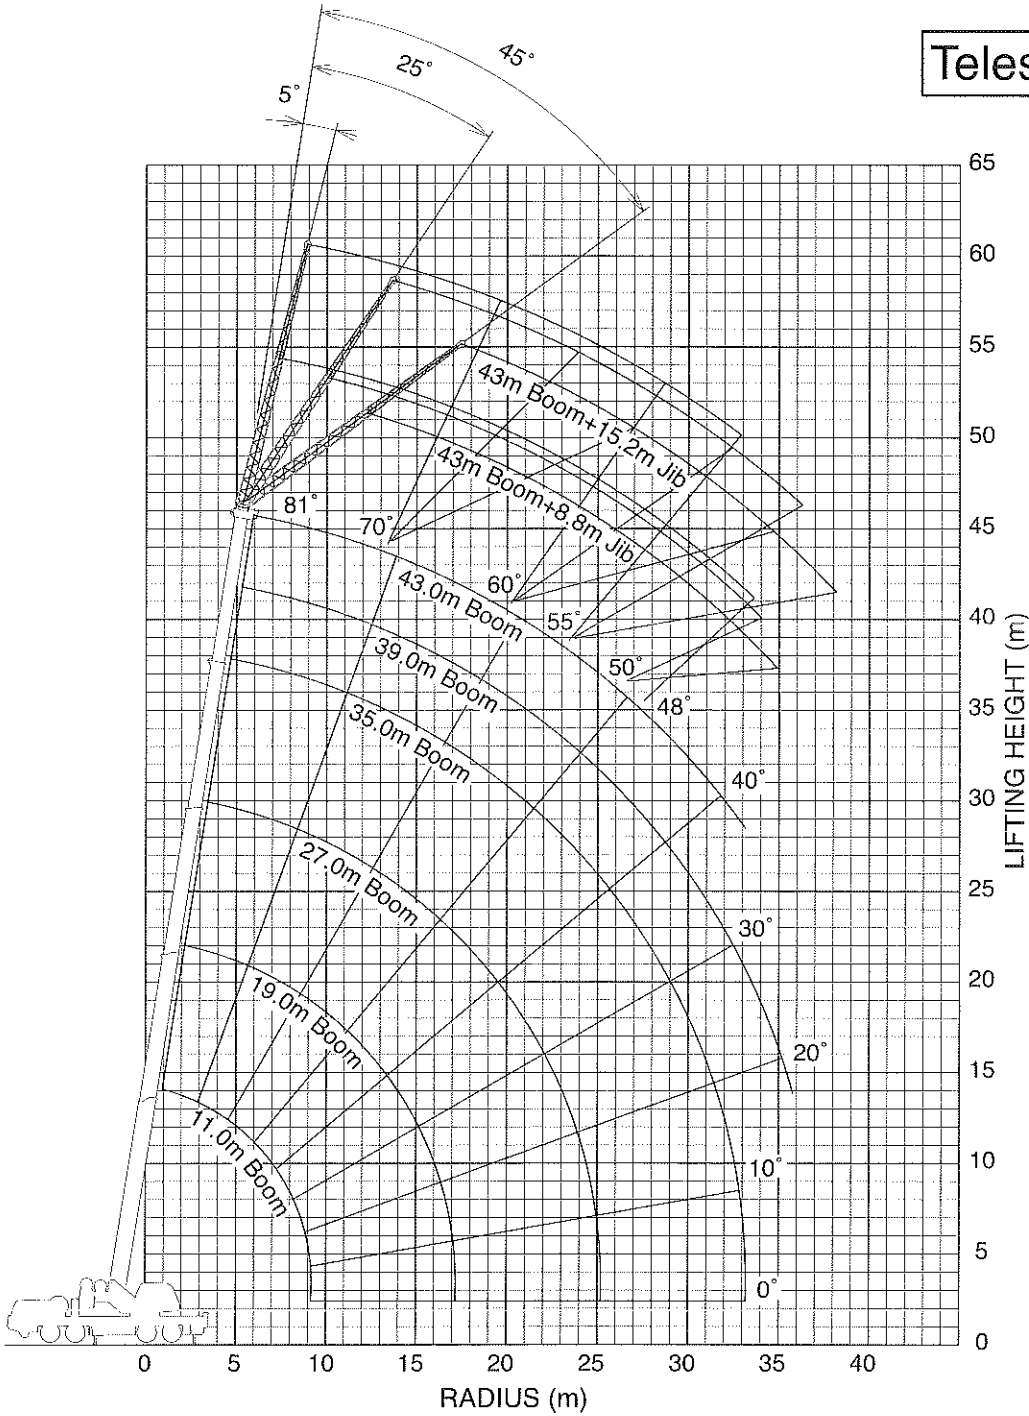


BOOM



JIB




SINGLE TOP



NOTE:

Boom and jib geometry shown are for unloaded condition and machine standing level on firm supporting surface. Boom deflection and subsequent radius and boom angle change must be accounted for when applying load to hook.

Boom Length

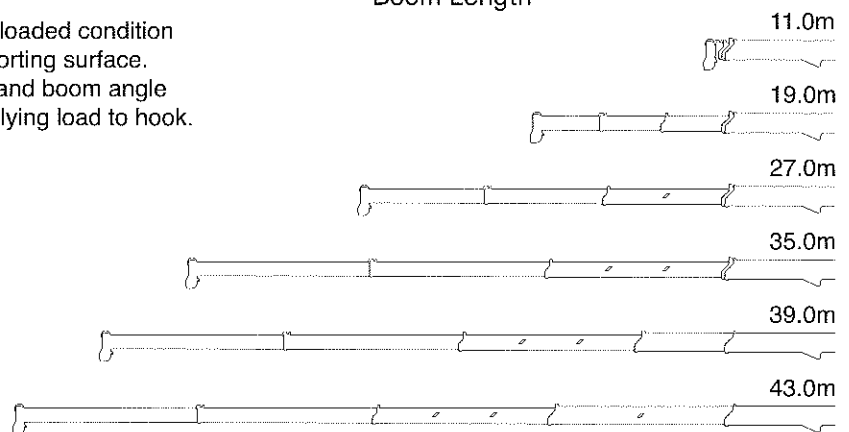

RATED LIFTING CAPACITIES (BOOM)

SPEC. SHEET NO. GT-600E-1-00202/EX-11

UNIT:x1000kg

Outriggers fully extended 7.0m																				
B	A	11.0m		15.0m		19.0m		27.0m		35.0m		39.0m		43.0m						
	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C					
3.0	70	60.0	76	40.8	79	32.0	79	22.0												
3.5	67	47.5	74	40.8	78	32.0	78	22.0												
4.0	64	42.4	72	40.8	76	32.0	76	22.0	81	22.0	81	17.0								
4.5	61	38.1	70	37.8	75	32.0	75	22.0	80	22.0	80	17.0								
5.0	58	34.5	68	34.2	73	32.0	73	22.0	79	22.0	79	17.0								
5.5	55	31.4	66	31.1	72	30.9	71	21.4	78	21.3	78	17.0								
6.0	51	28.7	63	28.4	70	27.4	70	20.6	77	20.7	77	17.0	80	14.0	81	12.0				
6.5	47	26.4	61	26.1	68	24.0	68	19.8	76	20.0	76	16.3	80	14.0	80	12.0				
7.0	43	24.4	59	23.5	67	21.1	66	19.1	75	19.5	75	15.4	79	14.0	79	11.9	80	10.0		
7.5	39	22.7	57	20.9	65	18.8	65	18.5	74	18.8	73	14.6	78	13.5	78	11.5	80	10.0		
8.0	34	20.0	54	18.7	63	16.9	63	17.9	72	17.1	72	13.9	77	13.0	77	11.1	79	10.0	80	8.5
9.0	29	15.7	49	15.0	60	13.9	60	16.8	70	14.3	70	12.6	76	12.1	76	10.3	78	10.0	79	8.5
10.0			43	12.0	56	11.6	56	14.7	68	12.2	68	11.6	74	11.7	74	9.7	76	9.7	78	8.5
11.0			38	9.8	52	9.5	52	12.4	65	10.5	65	10.7	72	10.2	72	9.0	75	9.2	77	8.5
12.0			28	8.2	47	7.9	48	10.6	63	9.2	63	9.9	70	9.0	71	8.4	73	8.7	76	8.1
14.0					37	5.5	38	7.9	58	6.9	58	8.3	67	7.1	67	7.3	70	7.5	73	6.9
16.0					24	3.8	25	6.2	52	5.2	52	6.5	63	5.6	63	6.4	67	6.1	70	5.5
18.0									46	3.9	46	5.2	59	4.4	59	5.4	63	5.0	66	4.4
20.0									39	3.0	40	4.2	55	3.5	55	4.4	60	4.0	63	3.6
22.0									31	2.2	32	3.5	50	2.7	51	3.6	56	3.2	60	2.9
24.0									20	1.6	22	2.9	46	2.1	46	3.0	52	2.6	57	2.3
26.0													41	1.6	41	2.5	48	2.1	53	1.8
28.0													35	1.2	35	2.1	43	1.7	50	1.4
30.0													28	0.8	28	1.7	39	1.3	46	1.0
32.0													18	0.5	18	1.4	33	1.0	42	0.7
34.0																	26	0.8	37	0.5
36.0																	17	0.6		
D							0°						18°	0°		17°				37°

Telescoping conditions(%)

Telescoping Mode	I, II	I	I	II	I	II	I	II	II	I, II
2nd boom	0	50	100	0	100	0	100	0	50	100
3rd boom	0	0	0	33	33	66	66	100	100	100
4th boom	0	0	0	33	33	66	66	100	100	100
Top boom	0	0	0	33	33	66	66	100	100	100

- A: Boom length (m)
- B: Load radius (m)
- C: Loaded boom angle (°)
- D: Minimum boom angle (°) for indicated length (no load)

NOTES :

1. Rated lifting capacities shown in the table are based on condition that the crane is set on firm level surface. Those above bold lines are based on crane strength and those below, on its stability.
2. Rated lifting capacities based on crane stability are according to ISO 4305 / DIN 15019 part 2.
3. The mass of the hook (570kg for *60t capacity, 410kg for *35t capacity, 150kg for *5.6t capacity), slings and all similarly used load handling devices must be considered as part of the load and must be deducted from the lifting capacities.
* : Optional
4. For rated lifting capacity of single top, reduce the rated lifting capacities of relevant boom according to a weight reduction for auxiliary load handling equipment. Capacities of single top shall not exceed 5,600 kg including main hook.
5. Standard number of part lines for each boom length is as shown below. Load per line should not surpass 54.9 kN {5,600 kgf} for main winch and auxiliary winch.

Boom length	11.0m	11.0m to 15.0m	15.0m to 19.0m	19.0m to 27.0m	27.0m to 43.0m	Jib / Single top
No. of part lines	12	10	7	5	4	1

The lifting capacity data stored in the AUTOMATIC MOMENT LIMITER (AML) is based on the standard number of parts of line listed in the chart.

Maximum lifting capacity is restricted by the number of parts of line of AUTOMATIC MOMENT LIMITER (AML).

6. Without front jack extended, when the boom is within the Over-front, rated lifting capacities are different from those for the boom in the Over-side and Over-rear.

RATED LIFTING CAPACITIES (BOOM)

SPEC. SHEET NO. GT-600E-1-00202/EX-11

UNIT:x1000kg

Outriggers extended to middle 4.8m																				
A \ B	11.0m		15.0m		19.0m		27.0m		35.0m		39.0m		43.0m							
	C		C		C		C		C		C		C							
3.0	70	40.0	76	36.0	80	32.0	79	22.0												
3.5	67	34.0	74	29.2	78	24.5	78	22.0												
4.0	64	27.8	72	22.9	76	19.6	76	22.0	81	17.0	81	17.0								
4.5	61	22.3	70	18.6	75	16.0	74	19.1	80	14.4	80	16.4								
5.0	58	18.4	68	15.4	73	13.4	73	16.3	79	12.4	79	14.3								
5.5	55	15.4	65	13.0	71	11.3	71	14.1	77	10.7	78	12.5								
6.0	51	13.2	63	11.2	70	9.7	70	12.3	76	9.4	76	11.1	80	8.7	80	10.0				
6.5	47	11.4	61	9.6	68	8.3	68	10.9	75	8.2	75	9.9	79	7.8	80	9.0				
7.0	43	9.9	59	8.3	66	7.2	66	9.7	74	7.3	74	9.0	78	6.9	79	8.2	80	7.4		
7.5	39	8.5	57	7.3	64	6.3	64	8.7	73	6.4	73	8.1	77	6.2	78	7.5	79	6.7		
8.0	33	7.3	54	6.3	63	5.5	63	7.8	72	5.7	72	7.4	77	5.6	77	6.8	78	6.1	80	5.3
9.0	19	5.5	49	4.9	59	4.1	59	6.4	69	4.6	70	6.1	75	4.6	75	5.7	77	5.1	78	4.4
10.0			43	3.7	55	3.1	55	5.3	67	3.6	67	5.2	73	3.7	73	4.9	75	4.3	77	3.6
11.0			36	2.7	51	2.2	51	4.4	65	2.9	65	4.4	71	3.0	71	4.2	74	3.6	76	3.0
12.0			28	1.9	47	1.5	47	3.5	62	2.3	62	3.7	69	2.5	70	3.6	72	3.1	74	2.5
14.0							38	2.3	57	1.3	57	2.7	66	1.6	66	2.7	69	2.2	71	1.6
16.0							25	1.5			52	1.9			62	2.0	66	1.5		
18.0											46	1.2			58	1.4				
20.0											39	0.7			54	0.9				
D		0°		0°		37°		0°		56°		37°		65°		53°		63°		70°
Telescoping conditions(%)																				
Telescoping Mode	I, II	I	I	II	I	II	I	II	I	II	II	I, II								
2nd boom	0	50	100	0	100	0	100	0	100	0	50	100								
3rd boom	0	0	0	33	33	66	66	100	100	100	100	100								
4th boom	0	0	0	33	33	66	66	100	100	100	100	100								
Top boom	0	0	0	33	33	66	66	100	100	100	100	100								

UNIT:x1000kg

Outriggers extended to minimum 2.59m										
A \ B	11.0m		15.0m		19.0m					
	C		C		C		C		C	
3.0	70	17.9	76	15.0	79	12.9	79	15.5		
3.5	67	14.5	74	12.3	78	10.6	77	13.0		
4.0	64	12.0	72	10.1	76	8.8	76	11.1		
4.5	61	10.0	70	8.5	74	7.4	74	9.6		
5.0	58	8.5	67	7.1	73	6.2	73	8.3		
5.5	55	7.3	65	6.0	71	5.2	71	7.3		
6.0	51	6.2	63	5.1	70	4.3	69	6.4		
6.5	47	5.4	61	4.3	68	3.6	68	5.7		
7.0	43	4.6	59	3.7	66	3.0	66	5.0		
7.5	39	3.9	56	3.1	64	2.5	64	4.5		
8.0	33	3.3	54	2.6	63	2.0	63	4.0		
9.0	19	2.3	48	1.7	59	1.2	59	3.2		
10.0			43	1.1			55	2.5		
11.0			39	0.5			51	2.0		
12.0							47	1.5		
14.0							38	0.7		
D		0°		0°		58°		36°		
Telescoping conditions (%)										
Telescoping Mode	I, II	I	I	II						
2nd boom	0	50	100	0						
3rd boom	0	0	0	33						
4th boom	0	0	0	33						
Top boom	0	0	0	33						

A: Boom length (m)
 B: Load radius (m)
 C: Loaded boom angle (°)
 D: Minimum boom angle (°) for indicated length (no load)

RATED LIFTING CAPACITIES (JIB)

SPEC. SHEET NO. GT-600E-1-00202/EX-11

UNIT:x1000kg

Outriggers fully extended 7.0m							Outriggers fully extended 7.0m						
C	43.0m Boom + 8.8m Jib						C	43.0m Boom + 15.2m Jib					
	5°Tilt		25°Tilt		45°Tilt			5°Tilt		25°Tilt		45°Tilt	
	R	W	R	W	R	W		R	W	R	W	R	W
81°	9.2	4.00	12.2	3.58	14.1	2.47	81°	11.3	2.60	16.2	1.69	19.5	1.17
80°	10.2	4.00	13.3	3.50	15.1	2.44	80°	12.5	2.60	17.4	1.65	20.6	1.15
79°	11.3	4.00	14.2	3.42	15.9	2.40	79°	13.6	2.60	18.4	1.61	21.5	1.13
78°	12.3	4.00	15.1	3.32	16.8	2.37	78°	14.8	2.60	19.5	1.58	22.4	1.12
77°	13.3	4.00	16.0	3.22	17.6	2.34	77°	15.9	2.56	20.4	1.54	23.4	1.10
76°	14.2	3.85	16.9	3.12	18.5	2.32	76°	17.0	2.46	21.5	1.51	24.3	1.09
75°	15.2	3.72	17.7	3.04	19.3	2.29	75°	18.1	2.38	22.4	1.48	25.2	1.08
73°	17.0	3.50	19.5	2.88	21.0	2.24	73°	20.1	2.22	24.3	1.43	27.0	1.05
70°	19.5	3.20	22.0	2.68	23.3	2.18	70°	23.0	2.01	27.2	1.35	29.4	1.02
68°	21.4	3.03	23.6	2.56	24.8	2.14	68°	25.1	1.90	29.0	1.31	31.1	1.00
65°	23.7	2.52	25.9	2.25	27.0	2.09	65°	27.8	1.75	31.8	1.25	33.5	0.98
63°	25.1	2.13	27.2	1.92	28.4	1.86	63°	29.5	1.52	33.3	1.21	35.1	0.97
60°	27.3	1.66	29.3	1.52	30.4	1.48	60°	31.8	1.14	35.7	0.99	37.1	0.95
58°	28.8	1.40	30.7	1.28	31.7	1.24	58°	33.4	0.92	37.0	0.81	38.2	0.77
55°	30.9	1.07	32.7	0.96	33.4	0.93	55°	35.7	0.66	39.1	0.56	40.1	0.53
53°	32.2	0.86	33.9	0.77	34.6	0.75							
50°	34.1	0.58	35.7	0.52	36.4	0.51							
48°	35.3	0.43											

UNIT:x1000kg

Outriggers fully extended 7.0m							Outriggers fully extended 7.0m						
C	39.0m Boom (telescoping mode II) + 8.8m Jib						C	39.0m Boom (telescoping mode II) + 15.2m Jib					
	5°Tilt		25°Tilt		45°Tilt			5°Tilt		25°Tilt		45°Tilt	
	R	W	R	W	R	W		R	W	R	W	R	W
81°	8.1	4.40	11.0	3.58	13.0	2.47	81°	10.2	2.60	15.0	1.69	18.3	1.17
80°	9.0	4.40	11.9	3.50	13.8	2.44	80°	11.3	2.60	16.0	1.65	19.3	1.15
79°	9.9	4.40	12.8	3.42	14.7	2.40	79°	12.3	2.60	16.9	1.61	20.2	1.13
78°	10.9	4.40	13.7	3.35	15.5	2.37	78°	13.4	2.60	17.9	1.58	21.0	1.12
77°	11.8	4.40	14.5	3.28	16.3	2.34	77°	14.4	2.56	18.8	1.54	21.9	1.10
76°	12.6	4.24	15.3	3.21	17.1	2.32	76°	15.4	2.46	19.8	1.51	22.7	1.09
75°	13.5	4.09	16.1	3.15	17.8	2.29	75°	16.3	2.38	20.7	1.48	23.5	1.08
73°	15.1	3.85	17.8	3.04	19.3	2.24	73°	18.2	2.22	22.5	1.43	25.1	1.05
70°	17.6	3.51	20.1	2.89	21.5	2.18	70°	20.9	2.01	25.1	1.35	27.4	1.02
68°	19.2	3.32	21.7	2.78	22.8	2.14	68°	22.7	1.90	26.8	1.31	28.9	1.00
65°	21.5	3.07	23.8	2.61	24.8	2.09	65°	25.3	1.75	29.1	1.25	31.0	0.98
63°	23.0	2.93	25.2	2.52	26.2	2.07	63°	27.0	1.67	30.8	1.21	32.4	0.97
60°	25.1	2.58	27.2	2.31	28.2	2.03	60°	29.4	1.56	33.0	1.16	34.4	0.95
58°	26.5	2.26	28.5	2.02	29.5	1.93	58°	31.1	1.49	34.5	1.13	35.7	0.94
55°	28.3	1.83	30.3	1.65	31.1	1.59	55°	33.2	1.29	36.5	1.09	37.5	0.93
53°	29.6	1.59	31.4	1.44	32.1	1.40	53°	34.6	1.10	37.8	0.96	38.6	0.90
50°	31.4	1.28	33.1	1.17	33.7	1.14	50°	36.6	0.85	39.4	0.74	40.0	0.71
48°	32.5	1.10	34.1	1.01	34.6	0.99	48°	37.8	0.70	40.5	0.62	41.0	0.59
45°	34.2	0.87	35.6	0.80	35.9	0.79	45°	39.6	0.51	42.1	0.45	42.3	0.44
43°	35.3	0.74	36.6	0.68			43°	40.8	0.41				
40°	36.8	0.57	37.4	0.52									
38°	37.7	0.46	38.8	0.43									

C: Boom angle

R: Load radius (m)

W: Rated lifting capacity

RATED LIFTING CAPACITIES (JIB)

SPEC. SHEET NO. GT-600E-1-00202/EX-11

UNIT:x1000kg

Outriggers fully extended 7.0m													
C	35.0m Boom (telescoping mode I) + 8.8m Jib						C	35.0m Boom (telescoping mode I) + 15.2m Jib					
	5°Tilt		25°Tilt		45°Tilt			5°Tilt		25°Tilt		45°Tilt	
	R	W	R	W	R	W		R	W	R	W	R	W
81°	7.3	4.50	10.3	3.58	12.1	2.47	81°	9.2	2.60	14.1	1.69	17.6	1.17
80°	8.1	4.50	11.1	3.50	12.8	2.44	80°	10.1	2.60	15.0	1.65	18.4	1.15
79°	8.9	4.50	11.8	3.42	13.5	2.40	79°	10.9	2.60	15.9	1.61	19.2	1.13
78°	9.7	4.50	12.5	3.35	14.2	2.37	78°	12.0	2.60	16.8	1.58	20.0	1.12
77°	10.5	4.50	13.4	3.28	14.9	2.34	77°	12.9	2.56	17.6	1.54	20.7	1.10
76°	11.3	4.50	14.1	3.21	15.6	2.32	76°	13.8	2.46	18.5	1.51	21.5	1.09
75°	12.1	4.50	14.9	3.15	16.3	2.29	75°	14.7	2.38	19.3	1.48	22.2	1.08
73°	13.6	4.50	16.3	3.04	17.7	2.24	73°	16.5	2.22	20.9	1.43	23.7	1.05
70°	16.0	4.44	18.5	2.89	19.6	2.18	70°	18.9	2.01	23.3	1.35	25.7	1.02
68°	17.4	4.21	19.8	2.80	20.9	2.14	68°	20.6	1.90	24.8	1.31	27.1	1.00
65°	19.5	3.91	21.8	2.69	22.7	2.09	65°	22.9	1.75	27.0	1.25	29.0	0.98
63°	20.8	3.53	23.1	2.62	23.9	2.07	63°	24.5	1.67	28.5	1.21	30.3	0.97
60°	22.6	2.90	25.1	2.53	25.7	2.03	60°	26.8	1.56	30.5	1.16	32.0	0.95
58°	23.9	2.52	26.2	2.27	26.9	2.01	58°	28.3	1.49	31.8	1.13	33.3	0.94
55°	25.6	2.03	27.8	1.85	28.4	1.76	55°	30.4	1.41	33.8	1.09	34.8	0.93
53°	26.8	1.75	28.9	1.61	29.4	1.54	53°	31.7	1.25	34.9	1.06	35.9	0.92
50°	28.4	1.40	30.3	1.29	30.8	1.25	50°	33.5	0.96	36.5	0.82	37.2	0.77
48°	29.5	1.20	31.4	1.11	31.7	1.08	48°	34.7	0.80	37.5	0.68	38.1	0.64
45°	31.0	0.94	32.7	0.88	32.9	0.86	45°	36.4	0.58	38.9	0.50	39.3	0.47
43°	32.0	0.79	33.6	0.74			43°	37.5	0.46				
40°	33.4	0.59	34.8	0.56									
38°	34.3	0.48	35.6	0.45									

C: Boom angle

R: Load radius (m)

W: Rated lifting capacity

RATED LIFTING CAPACITIES (JIB)

SPEC. SHEET NO. GT-600E-1-00202/EX-11

UNIT:x1000kg

Outriggers extended to middle 4.8m						
C	43.0m Boom + 8.8m Jib					
	5°Tilt		25°Tilt		45°Tilt	
	R	W	R	W	R	W
81°	9.2	4.00	12.6	3.16	14.1	2.47
80°	10.1	3.49	12.9	2.74	15.1	2.43
79°	10.9	2.99	13.6	2.38	15.8	2.13
78°	11.7	2.56	14.5	2.06	16.5	1.85
77°	12.6	2.18	15.2	1.77	17.2	1.60
76°	13.4	1.85	16.0	1.50	18.0	1.38
75°	14.2	1.55	16.8	1.26	18.7	1.17

Outriggers extended to middle 4.8m						
C	43.0m Boom + 15.2m Jib					
	5°Tilt		25°Tilt		45°Tilt	
	R	W	R	W	R	W
81°	11.3	2.60	16.2	1.69	19.5	1.17
80°	12.4	2.48	17.3	1.65	20.9	1.15
79°	13.4	2.08	18.2	1.45	21.5	1.13
78°	14.2	1.72	19.1	1.22	22.4	1.07
77°	15.1	1.42	19.9	1.02	23.1	0.90
76°	16.0	1.15				

UNIT:x1000kg

Outriggers extended to middle 4.8m						
C	39.0m Boom (telescoping mode II) + 8.8m Jib					
	5°Tilt		25°Tilt		45°Tilt	
	R	W	R	W	R	W
81°	8.1	4.40	11.0	3.58	13.0	2.47
80°	9.0	4.40	11.9	3.50	13.8	2.44
79°	9.9	4.21	12.7	3.30	14.6	2.40
78°	10.7	3.70	13.5	2.94	15.5	2.37
77°	11.4	3.25	14.3	2.62	16.3	2.34
76°	12.2	2.86	15.0	2.33	16.9	2.10
75°	13.0	2.52	15.7	2.06	17.7	1.88
73°	14.5	1.94	17.2	1.61	19.0	1.48
70°	16.8	1.26	19.3	1.06	21.0	0.99
68°	18.3	0.91	20.7	0.76	22.2	0.72


Outriggers extended to middle 4.8m						
C	39.0m Boom (telescoping mode II) + 15.2m Jib					
	5°Tilt		25°Tilt		45°Tilt	
	R	W	R	W	R	W
81°	10.2	2.60	15.0	1.69	18.4	1.17
80°	11.3	2.60	16.0	1.65	19.3	1.15
79°	12.3	2.60	17.0	1.61	20.1	1.13
78°	13.4	2.60	17.9	1.58	21.0	1.12
77°	14.2	2.31	18.8	1.54	21.9	1.10
76°	15.0	1.99	19.8	1.50	22.7	1.09
75°	15.8	1.72	20.6	1.31	23.5	1.08
73°	17.5	1.26	22.1	0.98	25.0	0.87

UNIT:x1000kg

Outriggers extended to middle 4.8m						
C	35.0m Boom (telescoping mode I) + 8.8m Jib					
	5°Tilt		25°Tilt		45°Tilt	
	R	W	R	W	R	W
81°	7.3	4.50	10.3	3.58	12.1	2.47
80°	8.1	4.50	11.1	3.50	12.8	2.44
79°	8.9	4.50	11.8	3.42	13.5	2.40
78°	9.7	4.24	12.6	3.35	14.2	2.37
77°	10.3	3.72	13.3	3.01	14.9	2.34
76°	11.0	3.26	14.0	2.67	15.6	2.32
75°	11.7	2.85	14.7	2.37	16.3	2.10
73°	13.1	2.18	16.0	1.84	17.5	1.65
70°	15.2	1.40	18.0	1.21	19.3	1.10
68°	16.5	1.00	19.1	0.86	20.5	0.79

Outriggers extended to middle 4.8m						
C	35.0m Boom (telescoping mode I) + 15.2m Jib					
	5°Tilt		25°Tilt		45°Tilt	
	R	W	R	W	R	W
81°	9.1	2.60	14.0	1.69	17.6	1.17
80°	10.1	2.60	15.0	1.65	18.4	1.15
79°	11.0	2.60	15.8	1.61	19.1	1.13
78°	12.0	2.60	16.7	1.58	19.9	1.12
77°	12.9	2.56	17.5	1.54	20.6	1.10
76°	13.8	2.40	18.4	1.51	21.5	1.09
75°	14.5	2.08	19.2	1.48	22.2	1.08
73°	16.1	1.55	20.7	1.14	23.5	0.96
70°	18.4	0.93				

C: Boom angle
R: Load radius (m)
W: Rated lifting capacity

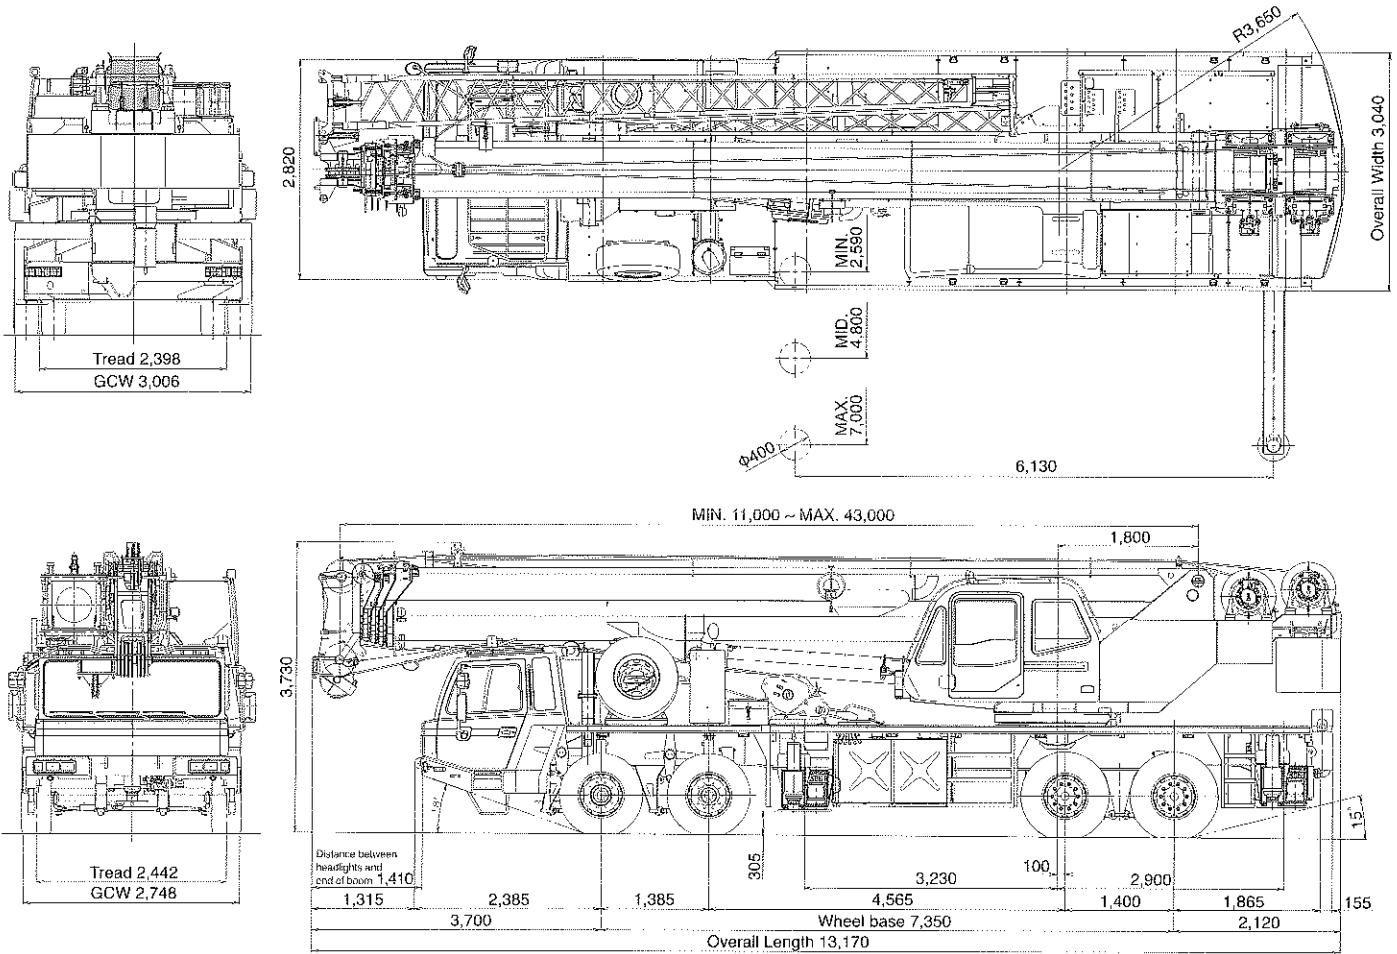

Axle Weight Distribution Chart

Unit : kg

	Total	Front	Rear
Base machine with 300L fuel:	41,300	15,800	25,500
Remove:			
1. 5.6t hook block	-150	65	-215
2. Top Jib (6.4m)	-225	-175	-50
3. Base Jib (8.8m)	-500	-490	-10
4. Single Top (Auxiliary boom sheave)	-50	-90	40
5. Spare Tire	-135	-140	5
6. Spare Tire Bracket	-30	-30	0
7. 35t hook block	-410	-280	-130
8. Counter weight and pins	-3,780	1,510	-5,290
Add:			
1. 60t hook block(optional)	570	390	180
2. 2 Persons (driver and passenger)	150	190	-40

Specifications are subject to change without notice.




TADANO


TADANO LTD. (International Division)

4-12, Kamezawa 2-chome,
Sumida-ku, Tokyo 130-0014, Japan

Tei : 81-(0)3-3621-7750

Fax : 81-(0)3-3621-7785

 <http://www.tadano.co.jp/indexe.htm>

 tdnihq@tadano.co.jp

Printed in Japan

GT-600E-2012-02-4